

The bubblizer

Dazzle Your Customers
with a Cascade of Bubbles



Ultra Foaming Applicator

- Thorough Soap Coverage
- Low Chemical Consumption
- For the Best Washing Experience


NS WASH
SYSTEMS
www.nswash.com

www.nswash.com

800.782.1582

www.nswash.com

The **bubblizer**

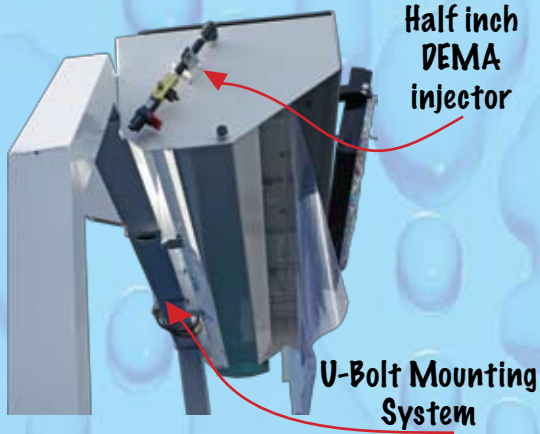

Specifications

- 1.5 HP/ 120VAC/ 1 phase/ 7 Amp motor
- All PVC internal bubblizer plumbing manifold
- Built-in DEMA chemical injection level
- Mechanical float switch for automatic system refill
- 8 cu .ft. Tank capacity
- Tank built with hinged top hatch for easy access
- Mounts to 4"x4" square anchor, 6"x6" square NS bulkhead or to 4"Ø round arch
- Powder-coated aluminum tank

Equipment Options

- Can be mounted to free-standing arches or equipment



We've Got You Covered

MADE IN

THE USA

Call Today

800.782.1582
Toll free

NS WASH
SYSTEMS
www.nswash.com
www.nswash.com

Due to Continuous research N/S Corporation reserves the right to upgrade or change at any time, specifications, or designs without notice and without incurring any obligations. Copyright © 2010 NS Corporation.

Bubblizer_0410.pdf
APRIL/2010