

ECO xpress wash

Compact Tunnel Design



Features

- Auto-handwash brushes are comprised of Lammscloth™ our patented super-soft synthetic fiber material
- At the front of the EcoXpress, the Bubblizer system applies a bubbling detergent for maximum cleaning submersion
- Adjustable directional, low-water, flow nozzles on all brushes directs a foaming action towards the vehicle's surface
- The top mitter curtains (front-to-rear; side-to-side), are also made of Lammscloth™ that cleans the entire upper surface of the vehicle




Wash Systems
Since 1961

800.782.1582

www.nswash.com

ECO_Xpress Wash

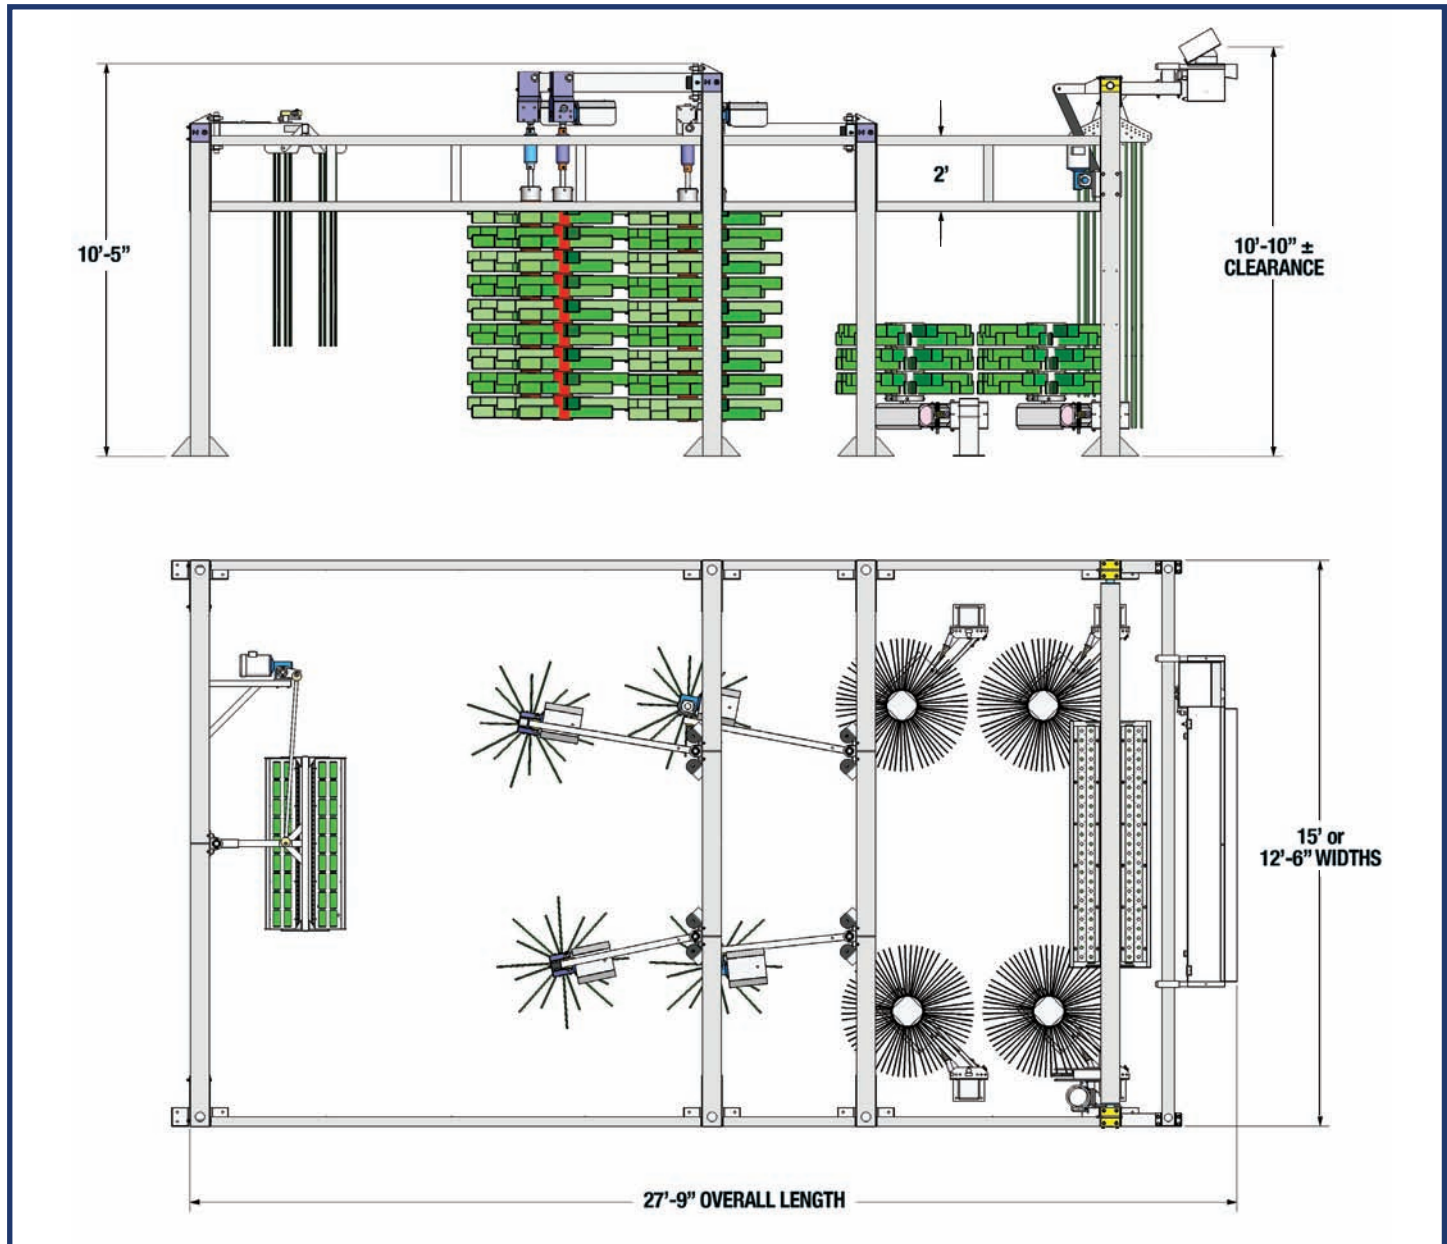

Benefits

- NS patented “wrap-a-round” cleaning systems wash the front, sides and rear of vehicles using gravity-activated brush arms eliminating the need for costly, complicated and high-maintenance hydraulic systems
- NS patented flexible shaft couplers:
 - Absorbs speeds of up to 5MPH
 - Eliminates brush shaft damage
 - Gives longer life to cleaning fibers
- Rugged structural frame (aircraft aluminum) designed for maximum strength and rust protection

Specifications

- 10HP total load to run the system
- Voltage: 208/230/480 - 60Hz
- AMPS: 45/40/120 maximum running load
- Foamer manifolds mounted to machine legs
- Single point for electrical, air connection and chemical

Equipment Options

- Motor control power (UL Approved) may be wall mounted or machine leg mounted
- Powder coating of aluminum structural frame for aesthetic appeal and added protection

N/S Corporation reserves the right to discontinue or change at any time, specifications, or designs without notice and without incurring any obligations. Copyright © 2008 N/S Corporation.