



# Nautica 4M<sup>TM</sup>

## Transit & Fleet Wash Series

For Buses, Cars, Vans, Campers,  
Trucks, Pick-Ups &  
Tractor-Trailers



**Rollover  
Wash  
System**

- ◆ **Speed and Quality are unmatched.**  
Double washes a bus in under 3.5 minutes, and a heavy truck in under 8 minutes.
- ◆ **Eliminates your downtime**  
With reliable components, easy system maintenance, and state of the art engineering.
- ◆ **Fleet washing without manual labor.**  
Once installed and operating, you'll wonder how you ever got along without it.
- ◆ **When comparing, remember...**  
The rugged **Nautica 4M** wash equipment will still be washing your fleet 10 years from now.



**800.782.1582**  
**www.nswash.com**

- ◆ Washes all shapes, sizes and configurations of vehicles.
- ◆ Indoor/Outdoor installation\* is simple: just provide a concrete pad, power, air and water, and we'll do the rest.
- ◆ Offers the smallest outside dimensions, yet is still engineered to wash higher and wider trucks than any other comparable unit.
- ◆ All brushes are made of extremely durable yet soft bristles that are carefully hand woven.
- ◆ There is an intensified rear wash program to effectively double wash the backs of vehicles.
- ◆ Compared to others, the advanced design employs component consistency and utilizes parts that are readily obtainable.

\*Outdoor installation is recommended only in areas with year-round moderate climate.

**Options**

- ◆ Dryer System
- ◆ Wax Applicator System
- ◆ Traffic Lights
- ◆ Under-Carriage Wash
- ◆ Vacuum System
- ◆ Electric Eye Activation
- ◆ Reverse Osmosis
- ◆ Water Recycle Systems
- ◆ Auto Start & More!


**Brush Path**



**Dimensions & Utility Requirements**

**Service Cable, Trolley & Hangers**

Can be mounted on either side of the wash bay, or optional posts are available for outside installation.

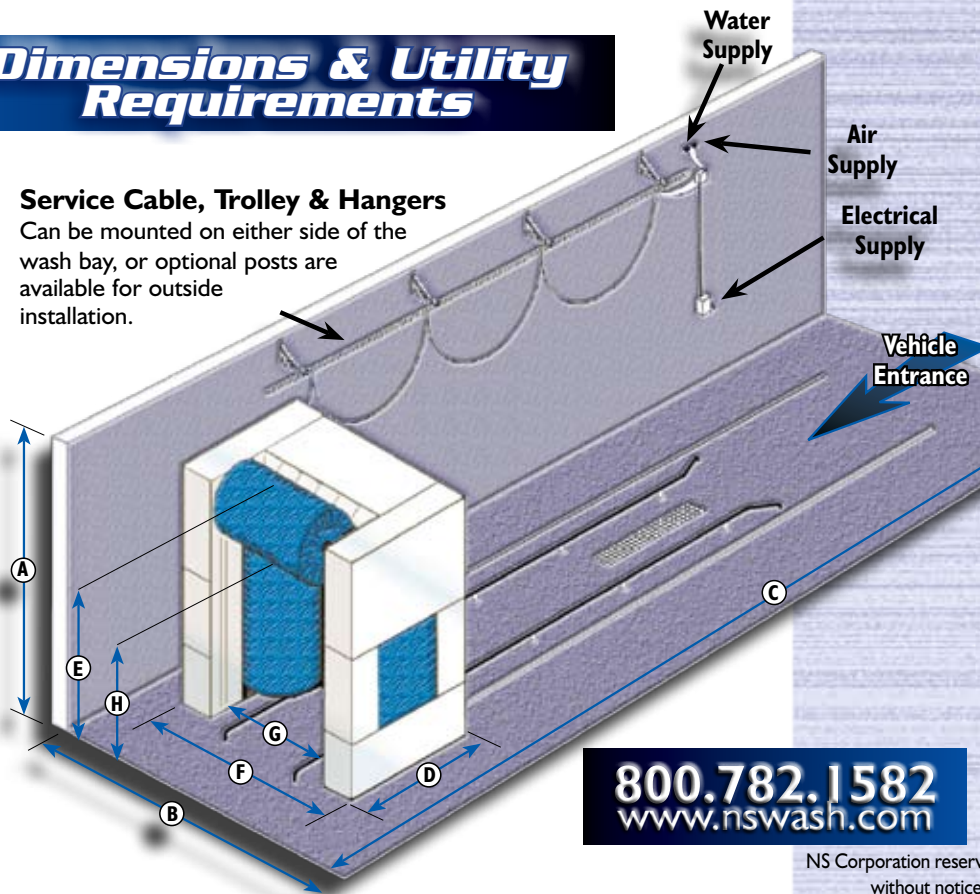

CUSTOMER SUPPLY REQUIREMENTS		
Water	Air	Electrical
1" LINE @ 50 PSI	1/2" LINE @ 80 PSI	208/230v, 3 ph. 30 amp - OR - 460/480v, 3 ph. 15 amp* - OR - 575/600v, 3 ph. 15 amp*

\*Optional transformer is required.

MODEL	RECOMMENDED WASHBAY DIMENSIONS			EQUIPMENT DIMENSIONS			VEHICLE DIMENSIONS	
	A	B	C	D	E	F	G	H
4M-12	17'	20'	18' PLUS LENGTH OF LONGEST VEHICLE	7'-6"	14'-4" (FRAME) + 1'-8" (With Top Brush in Highest Position)	15'-7"	10'	Up To 12'
4M-14	19'	20'	18' PLUS LENGTH OF LONGEST VEHICLE	7'-6"	16'-4" (FRAME) + 1'-8" (With Top Brush in Highest Position)	15'-7"	10'	Up To 14'

Please Call NS for smaller wash bay installation information.

**800.782.1582**  
www.nswash.com

NS Corporation reserves the right to discontinue or change, at any time, specifications or designs without notice and without incurring any obligations. Copyright © 2010 NS Corporation.